



**RỒNG VÀNG
TECHNOLOGY**

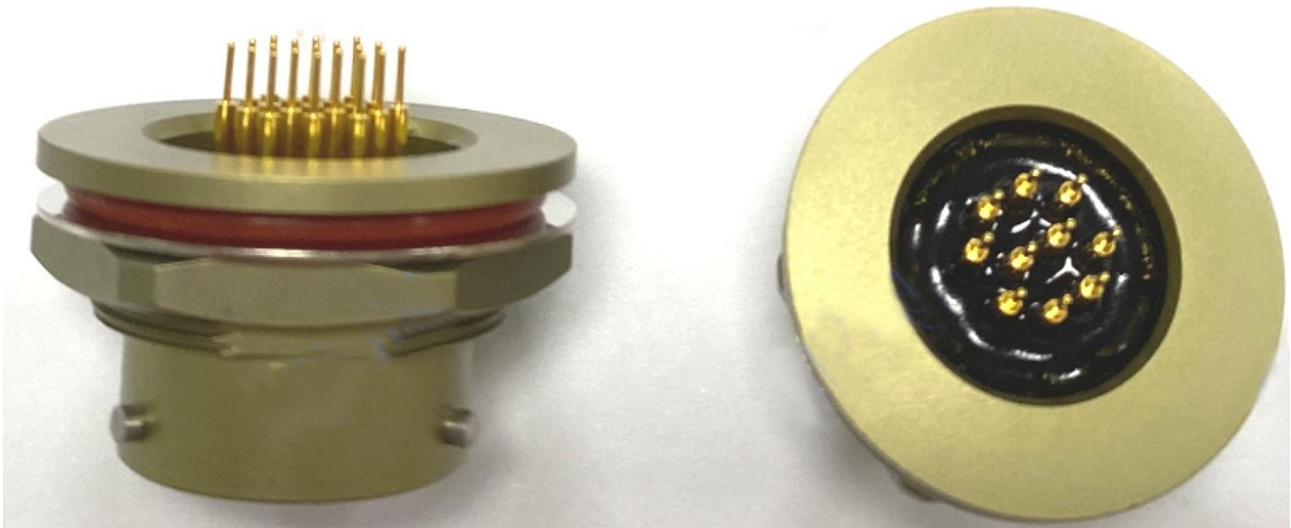


Ultra-Small Hermetic Electrical Connectors

OHs-BC-1(2) series

substitutes of Russian ONts-BS-1(2)

www.rong-vang-technology.vn



Description

Connectors of OHS-BC-1(2) (Hermetic Jam Nut Receptacles with PCB contacts) are designed for use in DC and AC circuits (up to 3 MHz) with voltage up to 250 V (amplitude value)

These connectors have multi key positioned (1, 2, 3) of shell polarization (protecting from misconnection of same contact layout connectors)

Bayonet coupling system

Hermetic Jam Nut Receptacles are manufactured without end accessories

Contact: $\varnothing$ 1 mm

Contact material:

- ONS-BC-2 – Gold over Copper alloy;
- ONS-BC-1 – Silver over Copper alloy;

Hermetic Jam Nut Receptacles OHS-BC-1(2) are intermateable with plugs of OHS-BC-1(2) & SNTs127

These connectors are manufactured for inner mounting for all climates in accordance with the technical conditions bRO.364.030 TU



Technical features

Description	Values
Contact Resistance	$\leq 5\text{m}\Omega$
Insulation resistance	$\geq 1000\text{ M}\Omega$ (Under normal conditions)
Operating temperature	up - 60°C to 105°C
Sealing	at pressure difference $1.01 \times 10^5\text{ Pa}$, 1min, no air leakage
Vibration	up to 5000 HZ at 20g
Impact	1000 g (once); 100 g (multiple times);
Contact diameter	$\varnothing 1.0\text{ mm}$
Durability	250 cycles
Operating hours	5000 hours
Guarantee period	15 years
Technical conditions	bR0.364.030 TU





Electrical

Shell number	Number of contacts	Max current Rating per contact (A)	Total current (A)	Operating Voltage (V)
10	4	3.7	15	250
12	7	3.1	22	250
14	10	3.0	30	250
18	19	2.1	40	250
22	32	1.8	60	250
27	50	1.5	75	250

Ordering information


Basic series	OHs-BC	-1	-4	/10	B	1	-1	-B
Contact plating:								
1: Silver								
2: Gold								
Number of contacts: 4, 7, 10, 19, 32, 50								
Shell size: 10, 12, 14, 18, 22, 27								
Contact Type:								
B: Pin								
Connector Types & End Accessories:								
1: Hermetic Jam Nut Receptacle without backshell								
Orientation: 1, 2, 3								
All weather (Obligatory suffix)								

Contact layouts

Number of contacts	4	7	10	19
Shell size	10	12	14	18
				
Number of contacts	32		50	
Shell size	22		27	
				


Dimensions

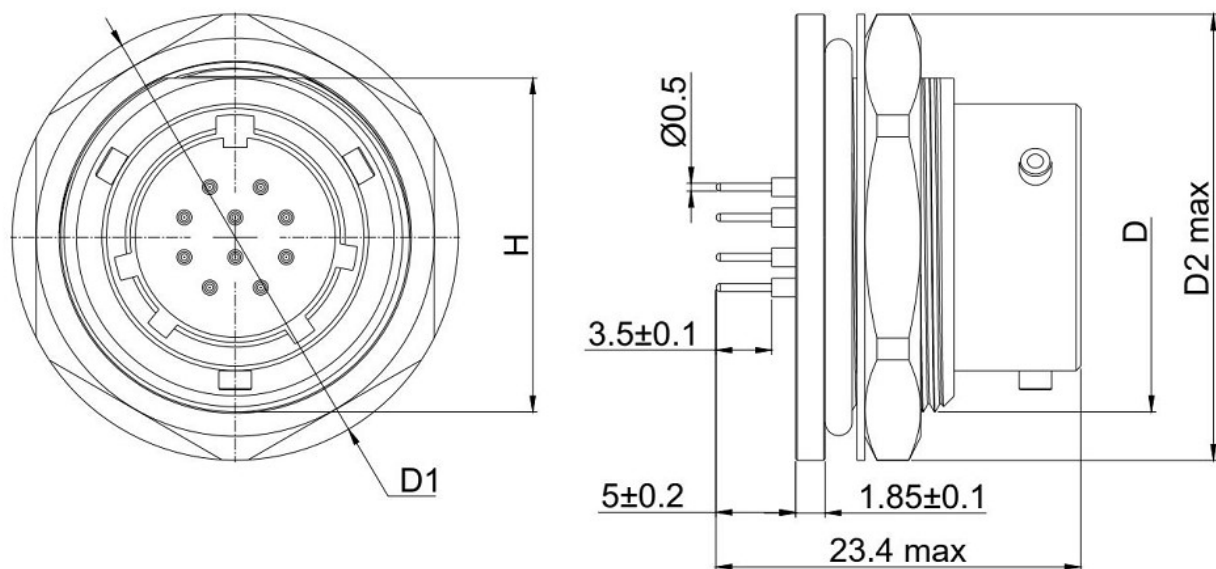Hermetic Jam Nut Receptacles without backshells




Shell size	Thread D	Ø D1	D2	H
10	M18x0.75	24.0	25.4	17.0
12	M20x0.75	25.0	27.8	19.0
14	M22x0.75	28.0	28.0	21.0
18	M24x0.75	31.0	31.0	30.0
22	M30x0.75	35.0	37.0	29.0
27	M33x0.75	40.0	41.6	32.0

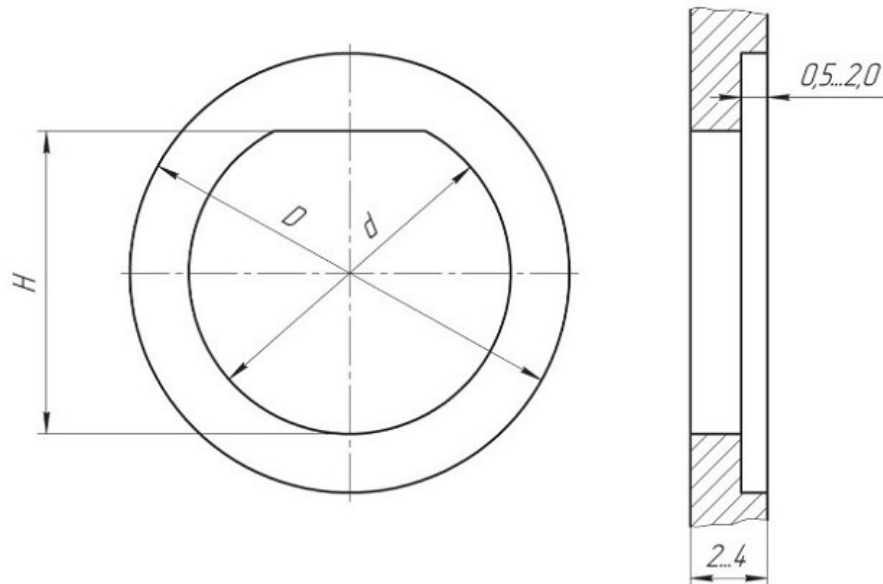Panel cut-out



Shell size	$D^{+0.1}$	$d^{+0.25}$	$H^{+0.1}$
10	24.5	18.2	17.2
12	25.5	20.2	19.2
14	28.5	22.2	21.2
18	31.5	24.2	23.2
22	35.5	30.2	29.2
27	40.5	33.2	32.2

Orientations

Shell size	Viewed from front face of plug	orientation angle codes	Angle in degrees			
			α	α_1	α_2	α_3
10, 12		1	105°	140°	215°	260°
14, 18, 22, 27		1	90°	135°	205°	260°
		2	105°	140°	215°	260°
		3	115°	145°	210°	250°



Cross reference list


Hermetic Jam Nut Receptacles without backshell

Russian Part No.	ALLCONN Part No.
ОНЦ-БС-1-4/10-B1-1-B	OHS-BC-1-4/10-B1-1-B
ОНЦ-БС-1-7/12-B1-1-B	OHS-BC-1-7/12-B1-1-B
ОНЦ-БС-1-10/14-B1-1-B	OHS-BC-1-10/14-B1-1-B
ОНЦ-БС-1-19/18-B1-1-B	OHS-BC-1-19/18-B1-1-B
ОНЦ-БС-1-32/22-B1-1-B	OHS-BC-1-32/22-B1-1-B
ОНЦ-БС-1-50/27-B1-1-B	OHS-BC-1-50/27-B1-1-B

Plugs with straight plastic backshells

Russian Part No.	ALLCONN Part No.
ОНЦ-БС-1-4/10-P12-1-B	OHS-BC-1-4/10-P12-1-B
ОНЦ-БС-1-7/12-P12-1-B	OHS-BC-1-7/12-P12-1-B
ОНЦ-БС-1-10/14-P12-1-B	OHS-BC-1-10/14-P12-1-B
ОНЦ-БС-1-19/18-P12-1-B	OHS-BC-1-19/18-P12-1-B
ОНЦ-БС-1-32/22-P12-1-B	OHS-BC-1-32/22-P12-1-B
ОНЦ-БС-1-50/27-P12-1-B	OHS-BC-1-50/27-P12-1-B

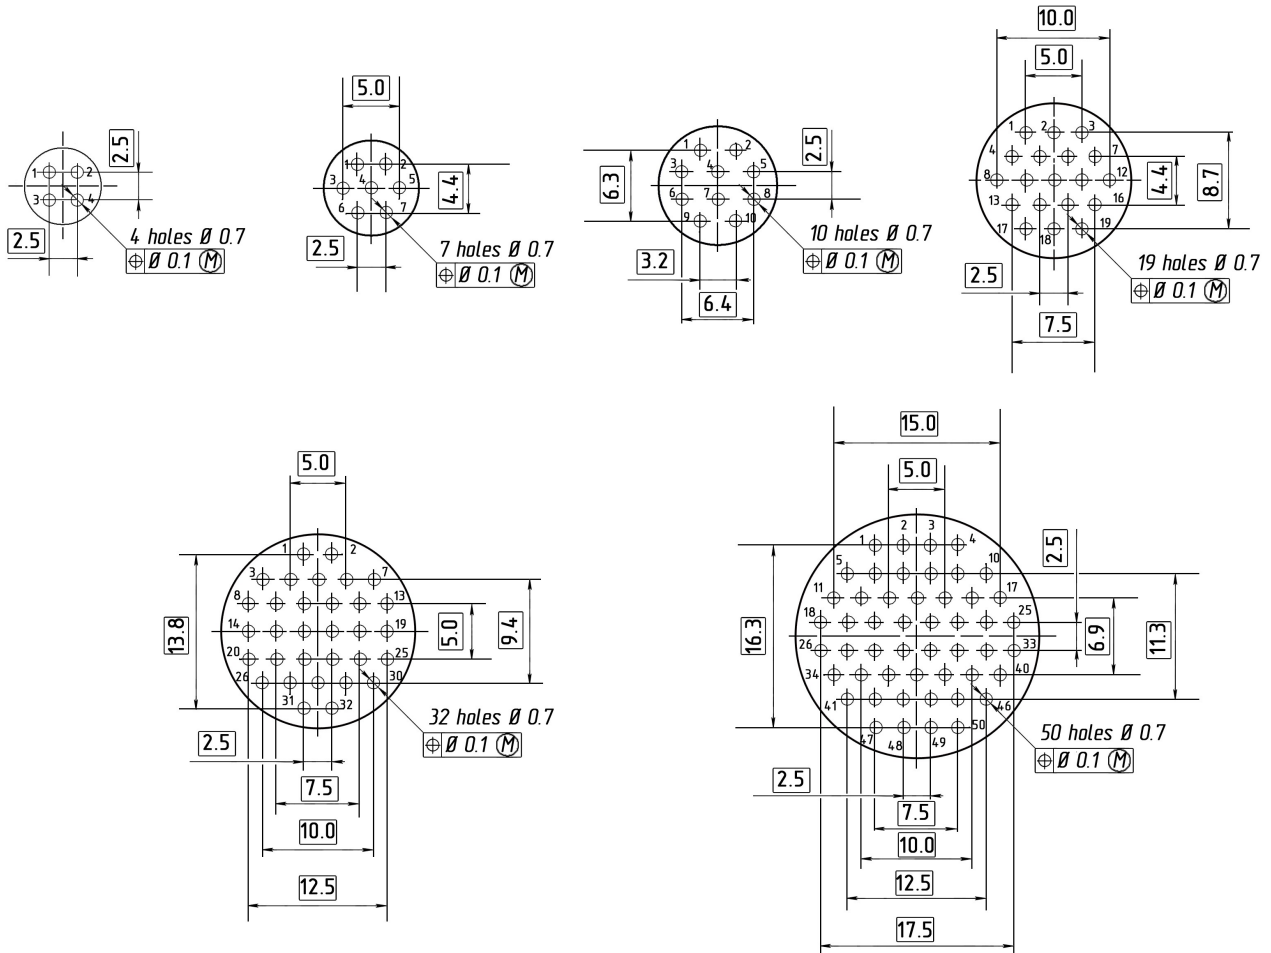Coordinates for straight PC tail terminations



CÔNG TY TNHH RỒNG VÀNG TECHNOLOGY

**Địa chỉ: 48/5 Phong Chau str,
Nam Nha Trang Ward,**

Khanh Hoa Province, Vietnam, 57123

Sđt: +84 79.219.2707

www.rong-vang-technology.vn

www.rong-vang-technology.vn